



## Wine Filtration

Selection guide for products and applications

aerospace  
climate control  
electromechanical  
**filtration**  
fluid & gas handling  
hydraulics  
pneumatics  
process control  
sealing & shielding



ENGINEERING YOUR SUCCESS.

# Contents



Introduction	3
Schematic	4
Application 1. Final stabilization	5
Application 2. Pre-stabilization	6
Application 3. Clarification	7
Application 4. Sterilization of gases	8
Application 5. Water utilities	9
Application 6. Gas utilities	10
Application 7. Chilling	11
Product selection process	12
Selecting the final filter	13
Filter housings	14
Products	15-16

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specification, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a product's suitability for specific applications. All products are sold subject to the company's Standard conditions of sale.

# Introduction

## Ensuring total process control for consistent quality

Old and new world producers of wine have partnered with Parker domnick hunter for over 30 years to ensure their process and quality needs are achieved.

A proven product range combined with knowledgeable specialists of the wine making process enables Parker domnick hunter to provide value added solutions that guarantee quality.


Parker domnick hunter aims to provide local application specialists focused on providing added value solutions to wine makers and contract packagers. The local team supported by innovative products, state-of-the-art manufacturing facilities and internationally specialised support teams are

all aimed at providing solutions which match Parker domnick hunter's capabilities with the business needs of the producer. By providing added value solutions, Parker domnick hunter give producers greater control of their process, which lead to increased quality of their wines.

This is achieved through a structured pre and after sales program called Purecare. The Purecare approach by Parker domnick hunter looks at all aspects of the process, aimed at increasing overall process efficiency and product consistency whilst protecting the unique quality of the finished product.

Using upfront detailed technical assessments and structured after-sales support packages, Purecare ensures Parker domnick hunter solutions meet agreed performance criteria and that they continue to operate at maximum efficiency.


Parker domnick hunter products and solutions have been specifically developed to provide the required quality at every stage of the wine making process, whilst protecting the unique characteristics of wine, increasing process efficiency and giving producers and bottlers greater control throughout their process.

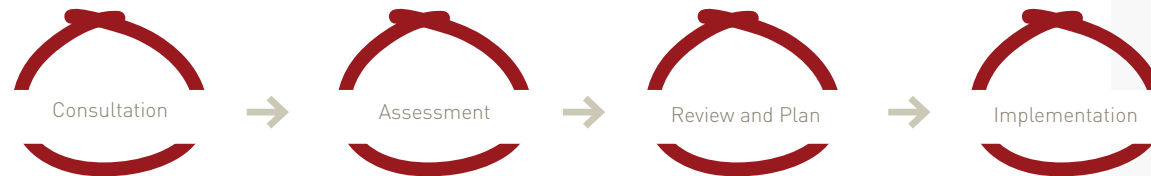

# Typical processes


Parker domnick hunter  
specialized wine  
applications

- 1 Final stabilization
- 2 Pre-stabilization
- 3 Clarification
- 4 Sterilization of gas
- 5 Water utilities
- 6 Gas utilities
- 7 Chilling

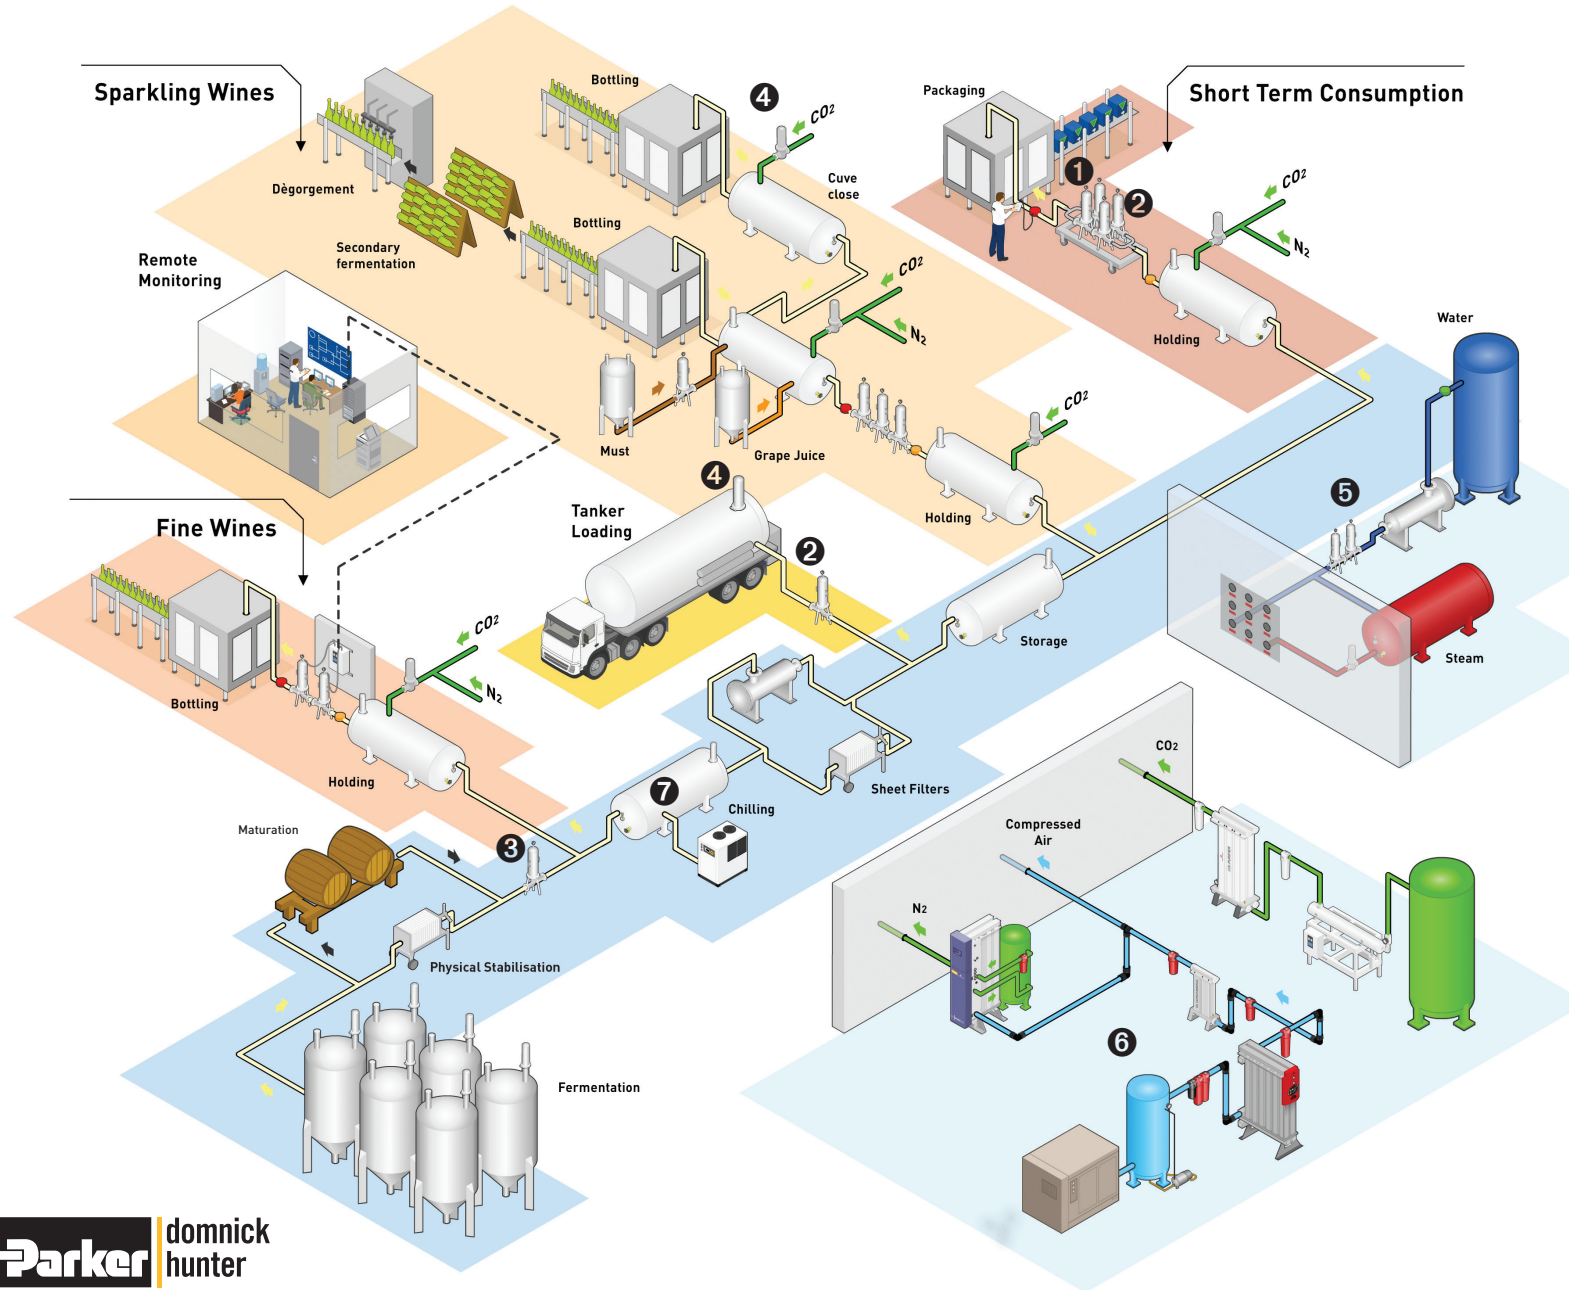

# Application 1. Final stabilization

## Understanding the application

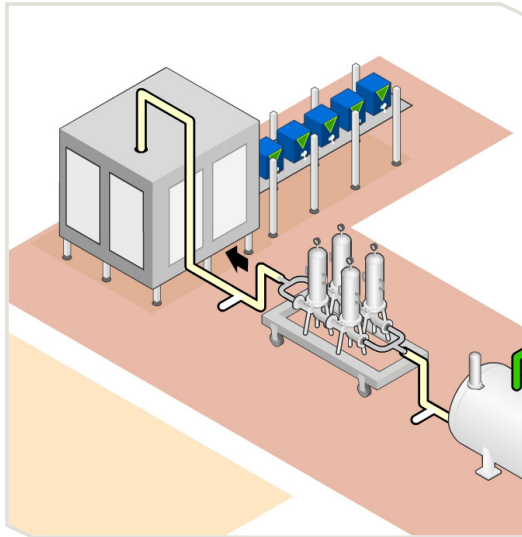


A number of factors influence the character and appeal of wine during its journey from the fermentation tank to the bottle, but in order to produce stable wine which protects and develops flavour once packaged, the presence of spoilage organisms has to be reduced or eliminated completely.

Typical spoilage organisms in bottled wine are species capable of growing in low pH and anaerobic conditions for example lactic acid bacteria and fermenting yeasts such as *Brettanomyces bruxellensis*. Spoilage organisms can ruin wine by causing off flavours and haze or cloudiness, with contamination from strongly fermenting yeasts causing bottle explosions.

Depending upon the type of the wine and the processes used during its production, the threat of microbial spoilage will vary. For example, relatively young wine with low tannin levels and high residual sugar may be subject to spoilage from low numbers of yeast / bacteria. Mature wines with high alcohol, tannin and low nutrients may be slightly more resistant, however, threats from microbial contamination still exist.


For red wines, membrane filtration down to 0.65µm is typically adequate to eliminate spoilage organisms, however, for white wines, 0.45µm is typically used. Filtration with a tighter membrane than is necessary will cause the filter to block quicker, resulting in an uneconomical process so care must be taken to use the correct grade for the conditions.

BEVPOR wine filters utilize an inert PES membrane which has been designed to protect the flavour and character of wine by providing validated retention to typical spoilage organisms, without impacting upon taste or colour profiles.

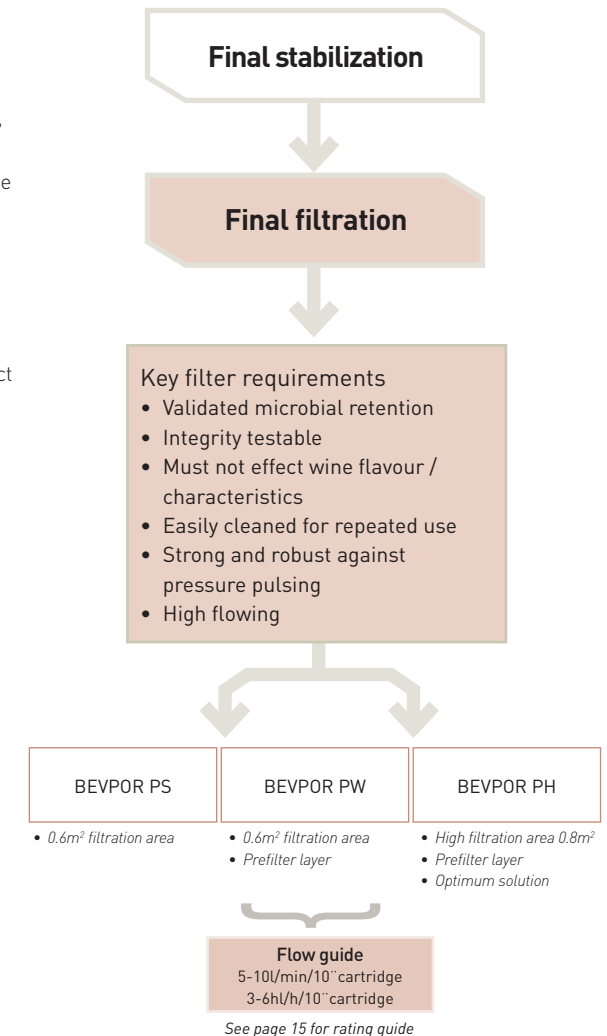

# Application 2. Pre-stabilization

Understanding the application

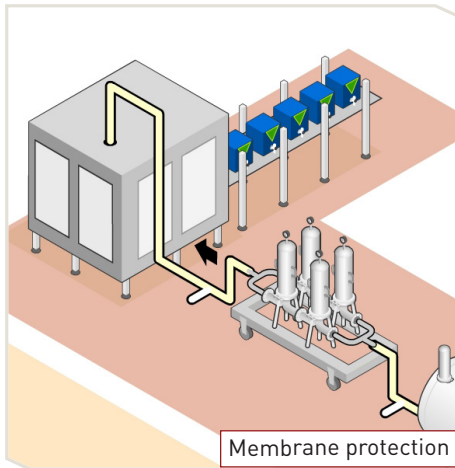


## Membrane Protection

In order to return long service life and efficient use of the final filtration system, the suspended particle and microbial loading of the wine should be reduced with adequate prefiltration. Final membrane filtration is normally the most expensive filter stage in the line and therefore, should only be used to remove microbes.

## Fine Wine Polish


Mature or fortified wine is already physically, chemically and microbiologically stable and only requires a final polish to improve clarity and to remove any yeast and bacteria which may be present.

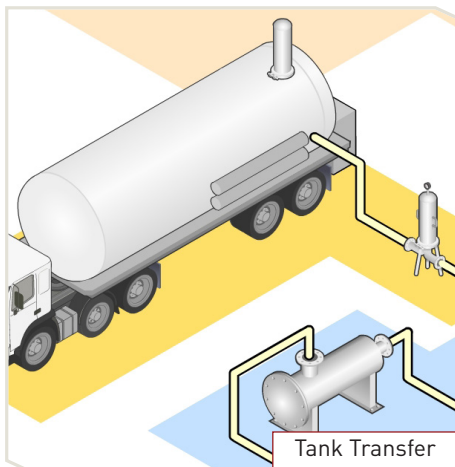

## Standardization: Tank Transfer and Cellar Management


In order to protect wine quality during storage or transportation, yeast and other microbial loadings should be reduced.

The PREPOR range of filters have been developed to excel in the previous applications, with the new PREPOR NG filter designed to offer the optimum choice for increased microbial security, fine particle retention and the strength necessary to withstand repeated cleaning and backwash regeneration.

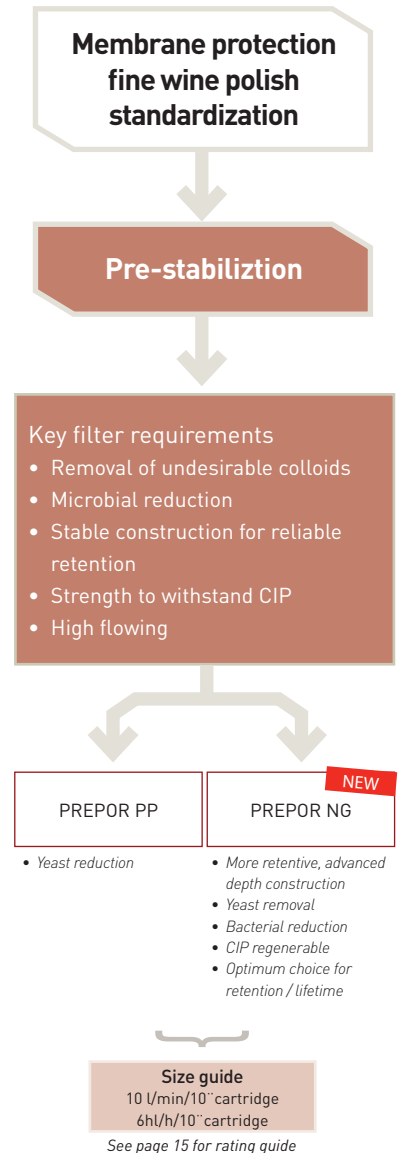

# Application 3. Clarification

## Understanding the application

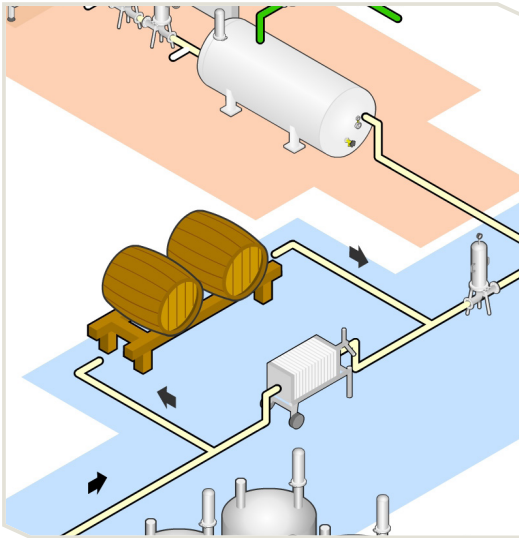

### Trap filtration


The trap filter system is designed to capture any solid particulate such as filter aids which may remain in the wine following primary clarification. The objective of this stage is to provide a consistent level of particulate filtration to help reduce filterability index and provide clear wine to intermediate storage.

### Crystal Removal

Potassium bitartrate and calcium tartrate crystals are naturally occurring precipitates in wine which form non-hazardous, glass-like crystals as the alcohol concentration increases during must fermentation. These crystals are undesirable as they are sometimes large enough to be visible to the naked eye (>40µm) and need to be removed during production. To remove the crystals, the wine is chilled to just above freezing point, facilitating crystallization and precipitation, and the crystals can then be removed by filtration.


Parker domnick hunter has designed the PEPLYN TF as the optimum solution for maximum efficiency in crystal removal and trap filtration applications. The filters have been specially designed to capture particles on the surface of the media so that they can be easily removed through backwash, therefore allowing easy regeneration and long service lifetimes. The high area filter media will return high wine flow, whilst providing an absolute retention to solid particulate.

PEPLYN HD filters provide an optional solution to trap filtration and crystal removal applications where backwash regeneration is not feasible.

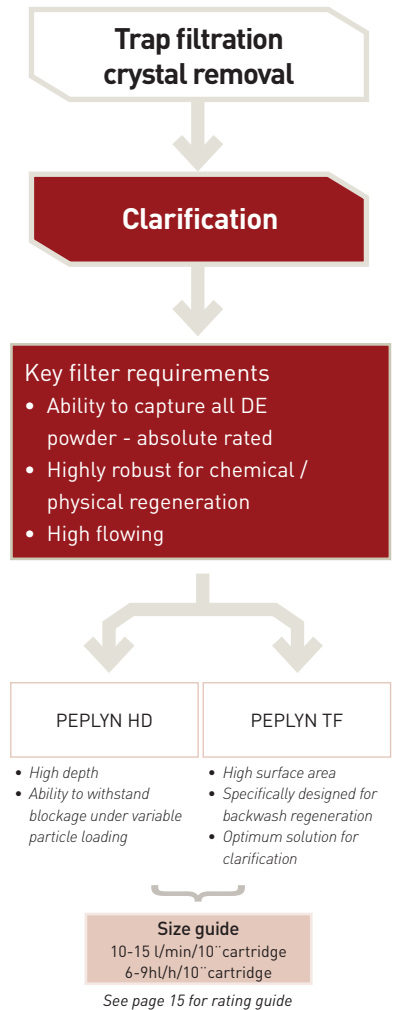


# Application 4. Sterilization of gases

Understanding the application

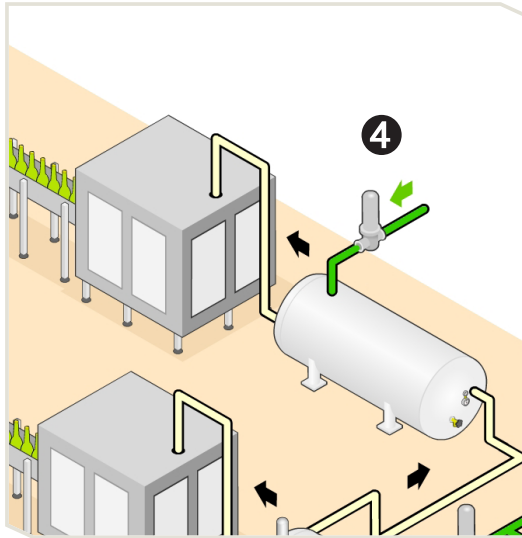

Compressed gases which come into direct contact with; ingredients, the finished product, packaging materials, storage vessels or the manufacturing machinery, are termed critical and require sterile filtration to safeguard against a potential contamination of the wine.


For aseptic filling operations, maintenance of machine sterility and the associated packaging such as bottles and caps becomes critically important. The filling machine will typically require at least one sterile gas filter to remove microorganisms from the nitrogen, CO<sub>2</sub> or compressed air used in the filling operation.

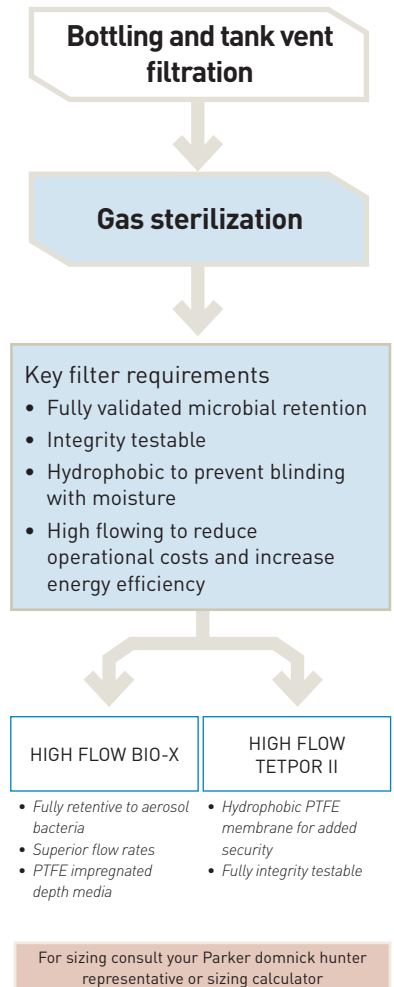




# Application 5. Water utilities

Understanding the application

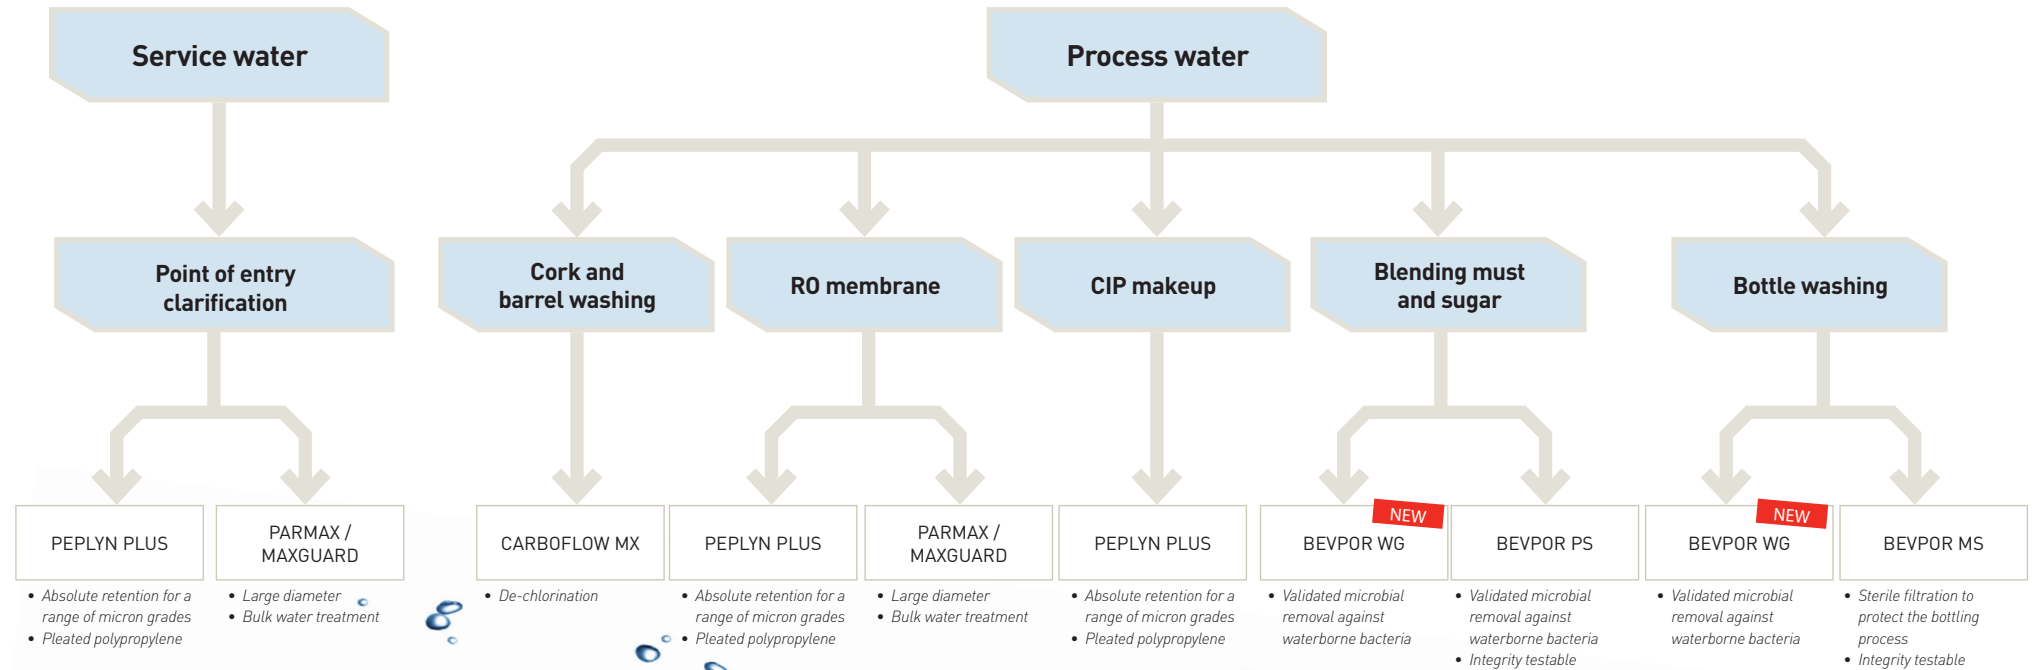

# Application 6. Gas utilities

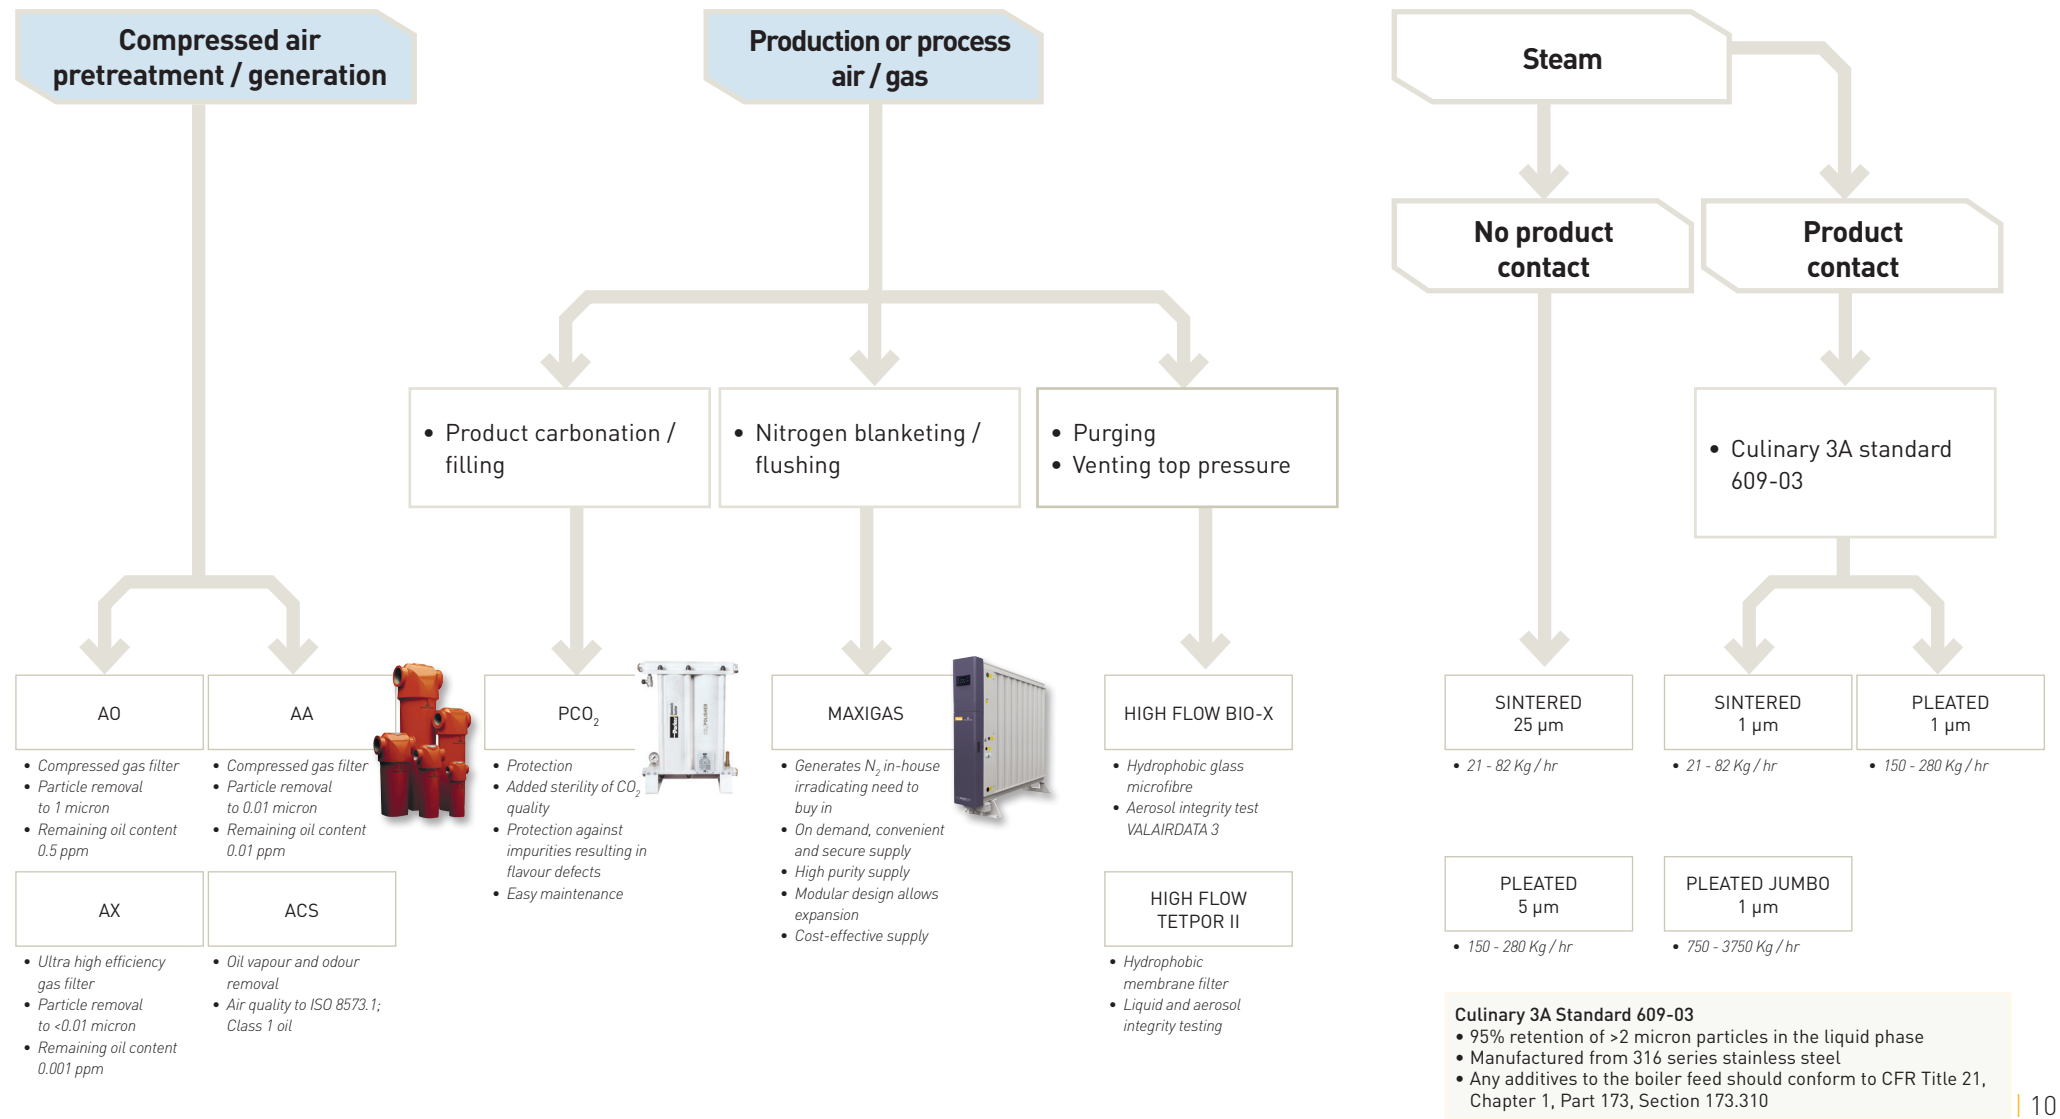

# Application 7. Chilling

## Creating the right environment

Process cooling is regularly used in the processing of wine:


- To regulate temperature during fermentation.
- During accelerated precipitation of tartrate crystals.
- To stabilize the wine during storage.

Parker domnick hunter Hiross has more than 30 years experience in the manufacture of industrial cooling systems. In recent years a wide range of chillers for the production of chilled water has been introduced. Coupled with a sales and engineering team capable of providing customized solutions to meet individual needs, this provides a dedicated approach to the requirements of winery applications.


The technology is characterized by a high refrigeration yield for low electrical consumption. Combined with a small footprint this leads to a compact, space-saving and energy efficient solution.

Chillers are available for internal and external installation and are equipped with microprocessor intelligence providing precise control and automatic function.


### In-Line Chilling

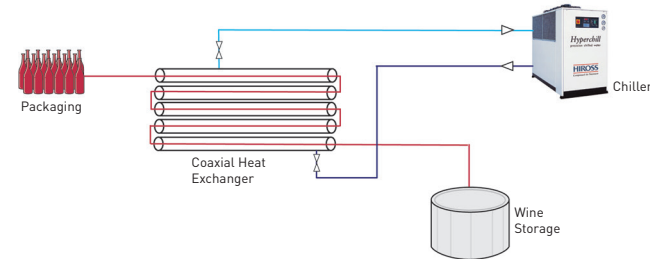

### Tank Chilling

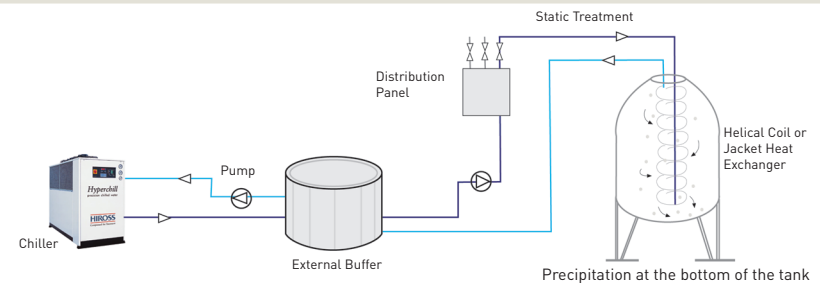


### Tartrate Precipitation

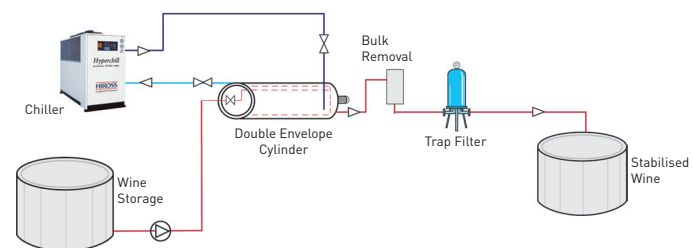

# Product selection process wine

There is no one single solution to an oenologist's filtration requirements. Depending on the region and international location, production methods vary significantly. It is therefore essential that a structured process for identifying efficient process filtration solutions is followed. The Purecare program outlines the required information prior to establishing a filtration solution and the assessment methods used to identify the suitability of any Parker domnick hunter solution.

The SELECT process builds on the principles used to select the optimum filtration solution for the end user. Starting with the end in mind following the outlined procedure will help to identify a suitable filtration solution.

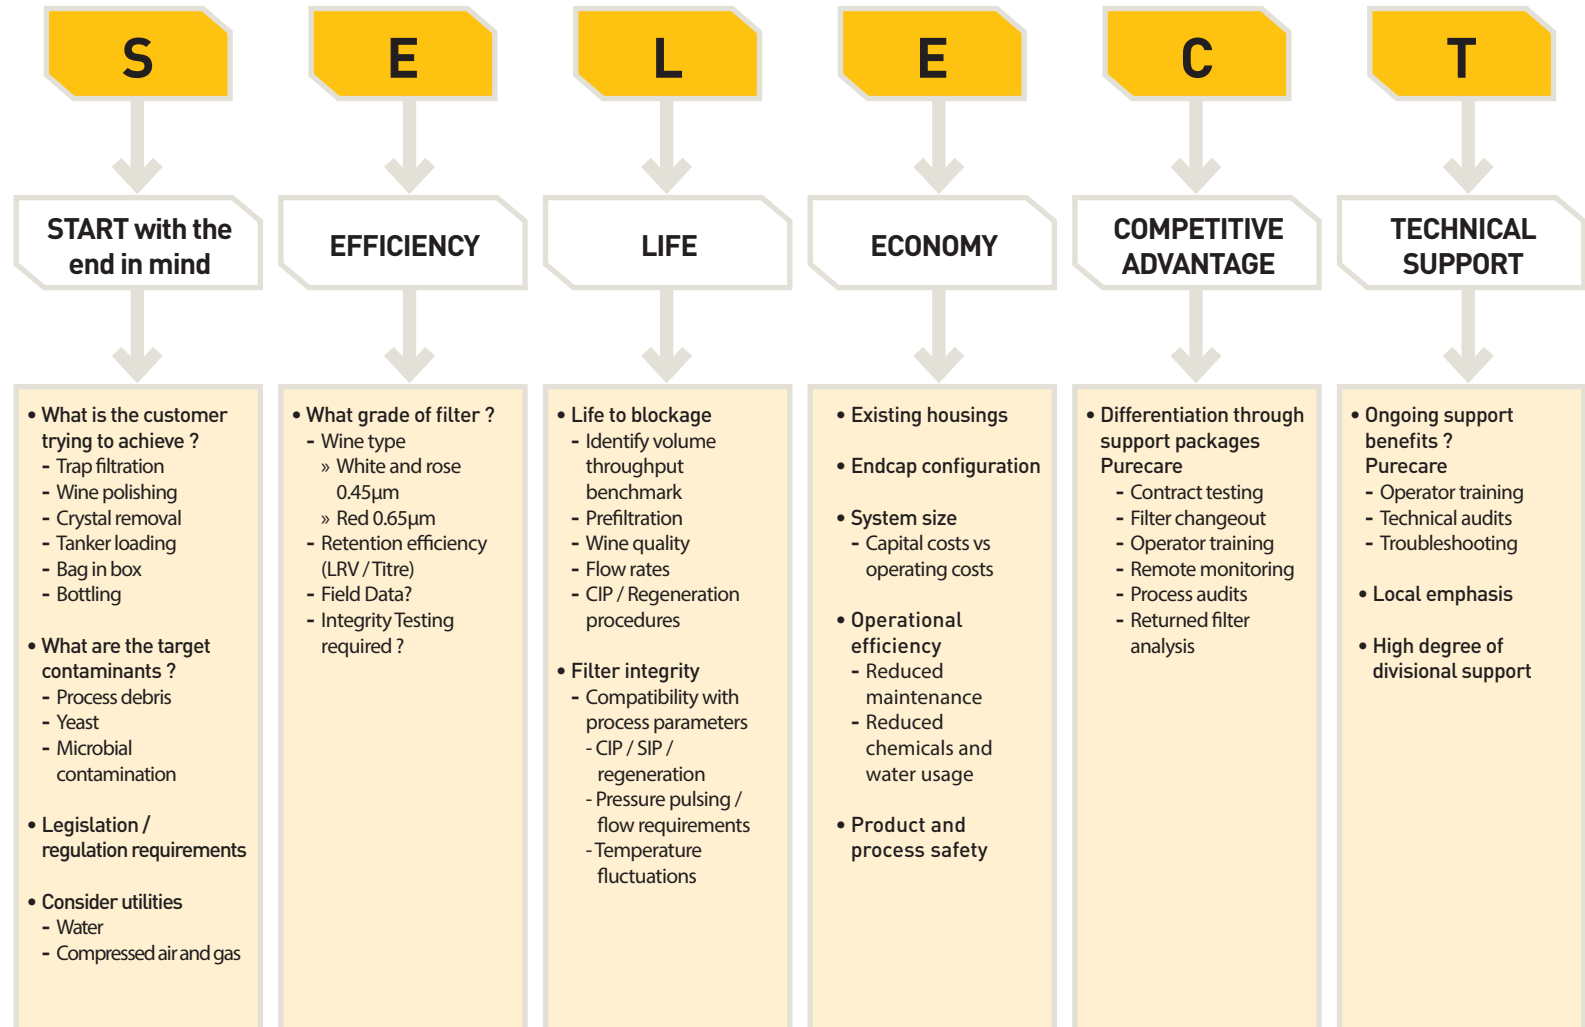


# Selection matrix

Prefilter **P**    Good **3**    Better **2**    Best **1**


	PARMAX / MAXGUARD	PROPLEAT	PEPLYN PLUS	CARBOFLOW MX	PEPLYN HD	PEPLYN TF	PEPLYN HA	PREPOR PP	PREPOR NG	BEVPOR PS	BEVPOR PW	BEVPOR PH	BEVPOR MS	BEVPOR WG	HIGH FLOW BIO-X	HIGH FLOW TETPOR II
Water Treatment	Point of entry clarification	1	3	2												
	Dechlorination	P	P		1											
	RO membrane protection	P	2	1												
	Bottle washing			P									1	2		
Clarification	Trap filtration				2	1										
	Crystal removal				2	1										
Pre-stabilization	Membrane protection						P	2	1							
	Fine wine polish / tank transfer							2	1							
Final Stabilization	Final filtration						P		P	3	2	1				
Gas Sterilization	Tank venting														2	1
	Nitrogen blanketing														2	1

# Filter housings

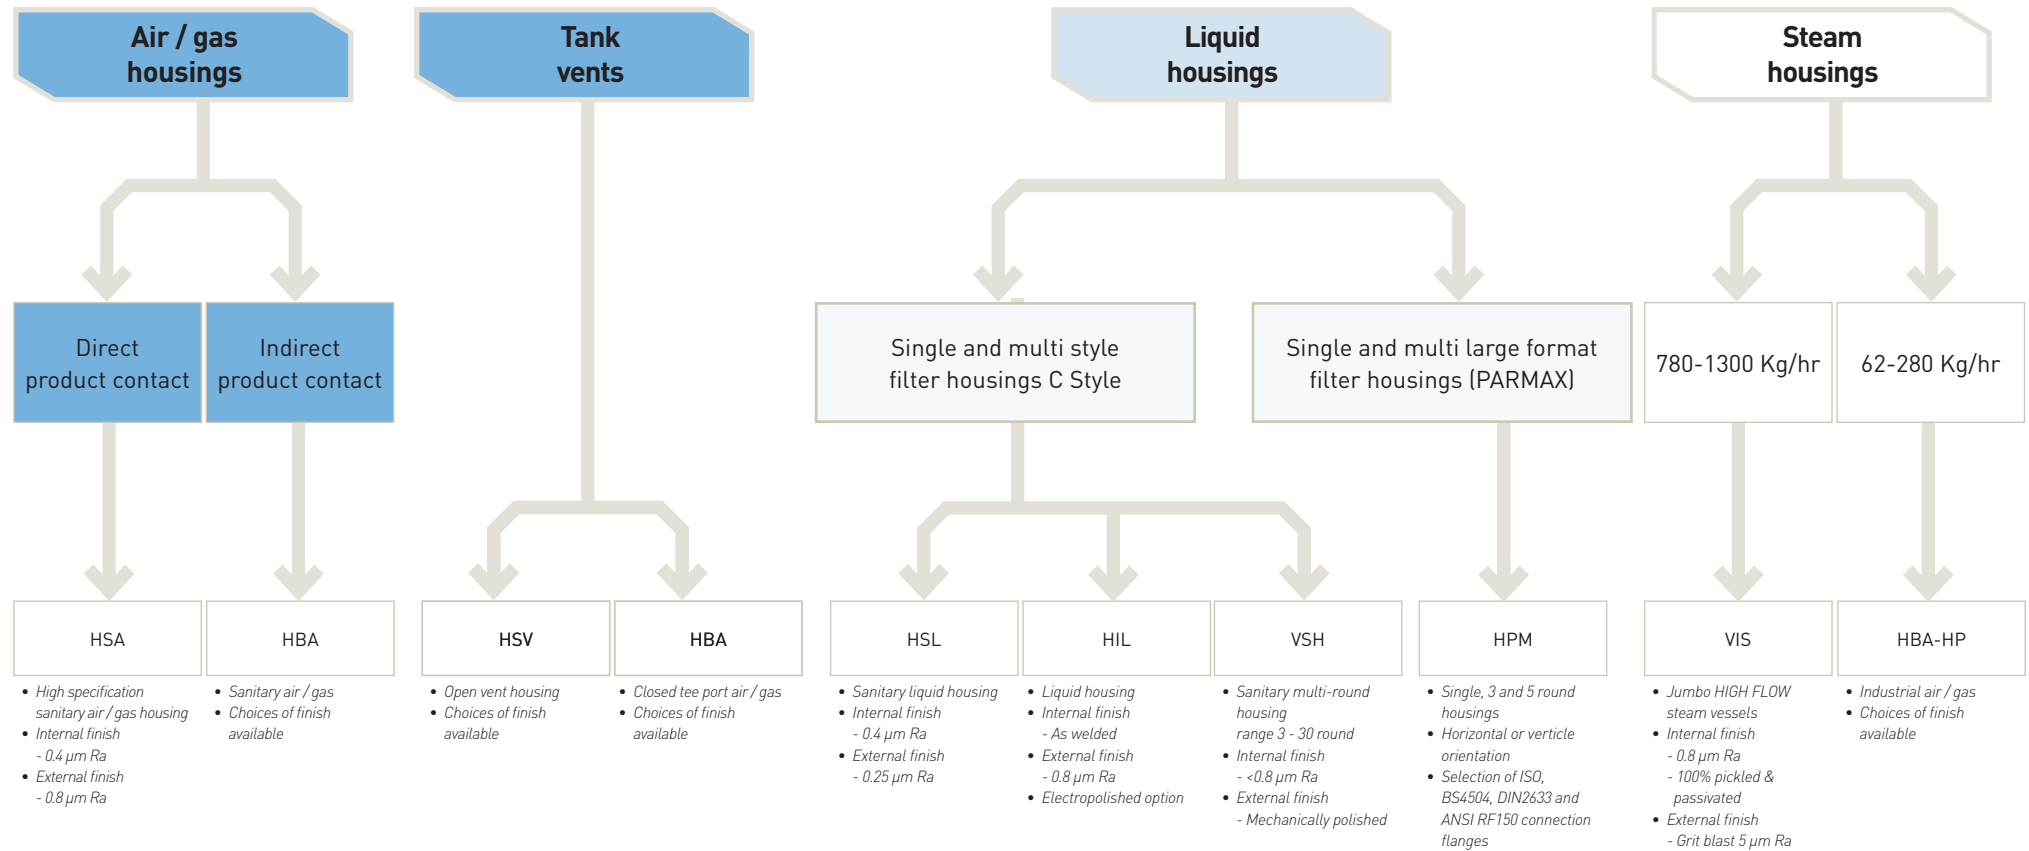

## Liquid filtration - Trap filtration and crystal removal

### PEPLYN HD




Polypropylene

5, 10, 15 micron

- Graded density and increased depth resulting in high dirt holding capacity
- Ideally suited to high volume, forward flow processes

PEPLYN HD has been developed using graded pore density depth polypropylene media for clarification of wine. The PEPLYN HD has outstanding particulate holding capacity through its multi-layer depth construction providing optimized filtration for wine with high particulate loading and size distribution.

### PEPLYN TF



Polypropylene


5,10 15 micron

- Graded density results in high dirt holding capacity
- Optimized pleat configuration maximizes backwash efficiency

PEPLYN TF filters have been specially designed to capture particles on the surface of the media so that they can be easily removed through backwash, therefore allowing easy regeneration and long service lifetimes. The high area filter media will return high wine flow, whilst providing an absolute retention to solid particulate.

## Pre-stabilization - Tank transfer, fine wines, membrane protection and cellar management

### PREPOR NG




Polypropylene

0.5 - 1.0

- Validated yeast removal and bacterial reduction
- Graded density construction for increased retention and throughput
- Strong, pleated polypropylene construction for backwash and chemical CIP

Combining a superior level of microbial retention with a strong and robust construction to withstand frequent CIP and backwash, PREPOR NG filters represent the optimum choice for pre-stabilization applications such as membrane protection and tank transfer operations.

### PREPOR PP




Polypropylene

0.6 - 1.0 micron

- Yeast and bacterial reduction
- Strong, pleated polypropylene construction for backwash and chemical CIP

PREPOR PP filter cartridges will significantly reduce the numbers of yeast and spoilage organisms from beverage products, to provide extremely cost effective microbial stabilization.

### PEPLYN HA



Polypropylene


1.0 - 20 micron

- Absolute particle retention at a range of micron grades
- Strong, pleated polypropylene construction designed for chemical CIP

PEPLYN PLUS filters are utilized for the clarification and pre-stabilization of a wide range of liquids for the food and beverage industry.

## Liquid filtration - Final stabilization

### BEVPOR PS



Polyethersulphone

0.45, 0.65 and 1.2 micron

- Validated microbial retention for effective stabilization
- 0.6m<sup>2</sup> filtration area

BEVPOR PS filters have been validated against typical wine spoilage organisms. Combined with easy integrity testing, the filters ensure the effective microbial stabilization of wine. The advanced polyethersulphone membrane has been configured to provide high flow and cost effective performance throughout the range of grades.

### BEVPOR PW



Polyethersulphone

0.45, 0.65 and 1.2 micron

- Validated microbial retention for effective stabilization
- 0.6m<sup>2</sup> filtration area
- Integral prefilter layer

BEVPOR PW filters have been validated against typical wine spoilage organisms. Combined with easy integrity testing, the filters ensure the effective microbial stabilization of wine. The advanced polyethersulphone membrane in conjunction with the integral prefilter layer provides extended service life to blockage and improved filtration economics.

### BEVPOR PH



Polyethersulphone

0.45, 0.65 and 1.2 micron

- Validated microbial retention for effective stabilization
- High filtration area - 0.8m<sup>2</sup>
- Integral prefilter layer

BEVPOR PH filters have been validated against typical wine spoilage organisms. Combined with easy integrity testing, the filters ensure the effective microbial stabilization of wine. The advanced, high area polyethersulphone membrane in conjunction with the integral prefilter layer will provide maximum service life to blockage and the optimum solution for wine stabilization.

## Air / Gas filtration

### HIGH FLOW BIO-X




PTFE Impregnated Glass Fibre

0.01 micron sterilising

- 94% voids volume PTFE impregnated glass fibre
- Exceptional flow rates with low pressure drops
- Integrity testable by aerosol challenge

HIGH FLOW BIO-X combines proven depth filter technology and a pleated construction to provide retention down to 0.01 micron in gas. Flow rates typically 2-3 times that of membrane filters make HIGH FLOW BIO-X the filter that can dramatically reduce cartridge usage and installation size within the fermentation, food and beverage industries.

### HIGH FLOW TETPOR II



Polypropylene Expanded PTFE


0.01 - 0.2 micron

- Assured biosecurity with absolute rated filtration
- High flow rates with low pressure drops
- High voids volume PTFE membrane

HIGH FLOW TETPOR II sterilisation filter cartridges offer exceptional filtration performance whilst providing the highest levels of biosecurity throughout the process industry. Operating at ambient temperature conditions, HIGH FLOW TETPOR II filter cartridges provide a cost effective filtration solution.

## Water treatment

### PROPLEAT




Polypropylene

1.0 – 10 micron

- Economical solution to particle removal

PROPLEAT filters have been developed to bridge the gap between meltblown depth filters and absolute pleated media filters. The all polypropylene construction exhibit 99% efficiency at their given retention rating, providing consistent and economical clarification in a diverse range of applications.

### PARMAX




Polypropylene

1 – 20 microns

- Large diameter filtration for high flow rates and high capacity
- Absolute retention ratings for critical filtration

PARMAX filters offer the optimum solution to bulk water treatment where costs of equipment space are at a high premium. The use of PARMAX large diameter cartridge and housing offers a smaller footprint which is advantageous. The cartridges are available in absolute micron ratings from 1 to 20 microns.

### PEPLYN PLUS




Polypropylene

0.6 – 25 micron

- Absolute particle retention at a range of micron grades
- Strong, pleated polypropylene construction designed for chemical CIP

PEPLYN PLUS filters are utilized for the clarification and pre-stabilization of a wide range of liquids for the food and beverage industry.

### BEVPOR WG




Polyethersulphone

0.2 micron

- Validated microbial removal against water borne bacteria

BEVPOR WG filters utilize a pleated PES membrane to remove bacterial contamination from water, ensuring the water supply entering the facility is of a safe standard to reduce the risk of biofilm formation / product spoilage.

### BEVPOR MS



Polyethersulphone

0.2 micron

- Validated microbial removal against water borne bacteria
- Integrity testable

BEVPOR MS filters utilize a pleated PES membrane to remove bacterial contamination from water, ensuring the water supply entering the facility is of a safe standard to reduce the risk of biofilm formation / product spoilage. Added security is ensured through ease of repeat integrity testing.



# Housings

## HSA

- Flow efficient sanitary range of air / gas housing
- Designed specifically for the food and beverage industry
- Sanitary tri-clamp, vent and drain connections as standard
- Sanitary tri-clamp body closure as standard



## HBA

- Flow efficient range of air / gas housing
- Designed to maximise flow and minimise pressure drop
- Designed specifically for the food and beverage industry



## HSV

- Industrial vent housing
- Direct connection to tank boss allows housing to be self supported
- Corrosion resistant 316L stainless steel
- Easy assembly and maintenance



## HSL

- Single-element sanitary liquid housing
- Designed specifically for the food and beverage industry
- Sanitary vent, tri-clamp connections as standard
- Sanitary tri-clamp body closure as standard



## HIL

- Industrial single-element liquid housing
- BSPP inlet / outlet standard connections
- Suitable replacement for plastic housings
- Suitable for cartridge types DOE or 222 and 226



## VSH

- Multi-element sanitary liquid housing
- Designed specifically for the food and beverage industry
- High quality crevice free construction
- Available for 3 to 30 round filters



## VIS

- High efficiency steam filter housing
- Compatible with JUMBO element to maximise steam capacity



## HBAHP

- Air / gas and steam housing
- For pressures up to 15 barg (232.06 psig) @ 205 °C (401 °F)
- Double bolted clamp for extra security
- Available with many connection types



# Integrity testing equipment

## VALAIRDATA 3

- Aerosol challenge testing
- Integrity testing of gas filters



## BEVCHECK

- Pressure decay and diffusional flow testing
- Hand held portability with rechargeable battery option
- Flexible: suitable for use with compressed air or nitrogen



## BEVCHECK PLUS

- Pressure decay and diffusional flow testing
- Convenient built-in printer provides printed test report
- Flexible: suitable for use with compressed air or nitrogen



# Compressed air pre-treatment

## OIL-X

- The most energy efficient filters available
- High quality ISO8573.1:2001 compressed air
- Running costs that start low and stay low



## PCO<sub>2</sub>

- Ensures compliance with quality guidelines published by the International Society for Beverage Technologies (ISBT)
- Protects drinks manufacturing processes from vapour impurities



## MAXIGAS

- Low life-cycle ownership cost and elimination of costs associated with a cylinder supply
- On-demand functionality limits waste
- Energy efficient: operates from a small compressor



# Parker Worldwide

AE – UAE, Dubai  
Tel: +971 4 8127100  
parker.me@parker.com

AR – Argentina, Buenos Aires  
Tel: +54 3327 44 4129

AT – Austria, Wiener Neustadt  
Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt  
Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

AU – Australia, Castle Hill  
Tel: +61 (0)2-9634 7777

AZ – Azerbaijan, Baku  
Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles  
Tel: +32 (0)67 280 900  
parker.belgium@parker.com

BR – Brazil, Cachoeirinha RS  
Tel: +55 51 3470 9144

BY – Belarus, Minsk  
Tel: +375 17 209 9399  
parker.belarus@parker.com

CA – Canada, Milton, Ontario  
Tel: +1 905 693 3000

CH – Switzerland, Etoy  
Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

CL – Chile, Santiago  
Tel: +56 2 623 1216

CN – China, Shanghai  
Tel: +86 21 2899 5000

CZ – Czech Republic, Klecany  
Tel: +420 284 083 111  
parker.czechrepublic@parker.com

DE – Germany, Kaarst  
Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

DK – Denmark, Ballerup  
Tel: +45 43 56 04 00  
parker.denmark@parker.com

ES – Spain, Madrid  
Tel: +34 902 330 001  
parker.spain@parker.com

FI – Finland, Vantaa  
Tel: +358 (0)20 753 2500  
parker.finland@parker.com

FR – France, Contamine s/Arve  
Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

GR – Greece, Athens  
Tel: +30 210 933 6450  
parker.greece@parker.com

HK – Hong Kong  
Tel: +852 2428 8008

HU – Hungary, Budapest  
Tel: +36 1 220 4155  
parker.hungary@parker.com

IE – Ireland, Dublin  
Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

IN – India, Mumbai  
Tel: +91 22 6513 7081-85

IT – Italy, Corsico (MI)  
Tel: +39 02 45 19 21  
parker.italy@parker.com

JP – Japan, Tokyo  
Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul  
Tel: +82 2 559 0400

KZ – Kazakhstan, Almaty  
Tel: +7 7272 505 800  
parker.easteurope@parker.com

MX – Mexico, Apodaca  
Tel: +52 81 8156 6000

MY – Malaysia, Shah Alam  
Tel: +60 3 7849 0800

NL – The Netherlands, Oldenzaal  
Tel: +31 (0)541 585 000  
parker.nl@parker.com

NO – Norway, Asker  
Tel: +47 66 75 34 00  
parker.norway@parker.com

NZ – New Zealand, Mt Wellington  
Tel: +64 9 574 1744

PL – Poland, Warsaw  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

PT – Portugal, Leca da Palmeira  
Tel: +351 22 999 7360  
parker.portugal@parker.com

RO – Romania, Bucharest  
Tel: +40 21 252 1382  
parker.romania@parker.com

RU – Russia, Moscow  
Tel: +7 495 645-2156  
parker.russia@parker.com

SE – Sweden, Spånga  
Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

SG – Singapore  
Tel: +65 6887 6300

SK – Slovakia, Banská Bystrica  
Tel: +421 484 162 252  
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto  
Tel: +386 7 337 6650  
parker.slovenia@parker.com

TH – Thailand, Bangkok  
Tel: +662 717 8140

TR – Turkey, Istanbul  
Tel: +90 216 4997081  
parker.turkey@parker.com

TW – Taiwan, Taipei  
Tel: +886 2 2298 8987

UA – Ukraine, Kiev  
Tel: +380 44 494 2731  
parker.ukraine@parker.com

UK – United Kingdom, Warwick  
Tel: +44 (0)1926 317 878  
parker.uk@parker.com

US – USA, Cleveland  
Tel: +1 216 896 3000

VE – Venezuela, Caracas  
Tel: +58 212 238 5422

ZA – South Africa, Kempton Park  
Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

European Product Information Centre  
Free phone: 00 800 27 27 5374  
(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, UK, ZA)

